



EE

08

M 6

EA1 .0

DESCRIPTION:

800 8 M 6 6000

6000

6 0 -9 1000

9 .

With 1000 008

M

6000 6

6000 6

6 6 6000

6 6 6000

02 6V 6

6

MAIN FEATURES

6 37 0 M

D 0 6 -9 1000

6 55 -

Z

U

6

6

6

6

6

6

6

ABSOLUTE MAXIMUM RATINGS

6

6

	I_{M} w=10 m	I_{M}	1	A
	T_j	T_j	125	
	P_o	P_o	250	W
	$(a = 125)$	$d/$	$P = 3.33$	W /
	P_b	P_b	350	W
	V_b	V_b	350	h
	T_p	T_p	-55+00	
	T_g	T_g	-55+50	
	T_b	T_b	20°	

NOTE1 AC for 1 minute, R.H.=40~60%


NOTE2 For 10 seconds

ELECTRICAL CHARACTERISTICS

Characteristics Curves

E1: ~~0~~ ~~100~~ mA

E2: 0 ~~100~~ mA
0

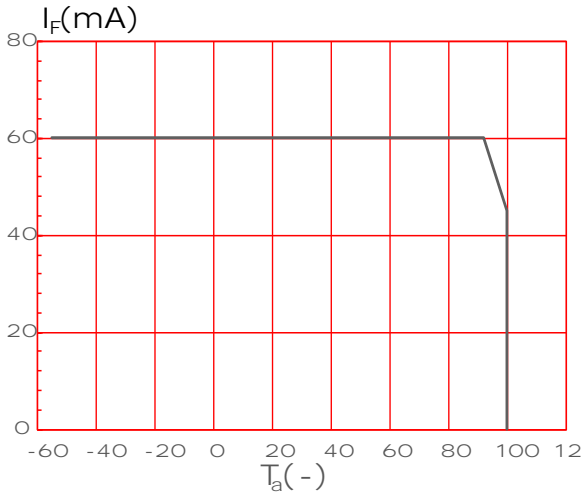

TEST CIRCUITS

Fig 1 2:

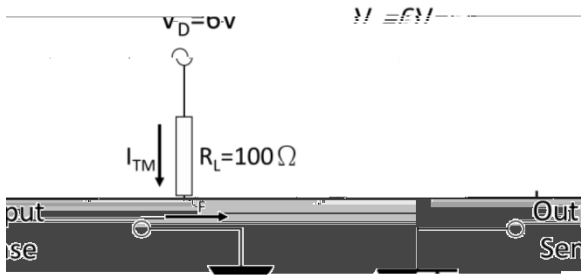


Fig 1 3:

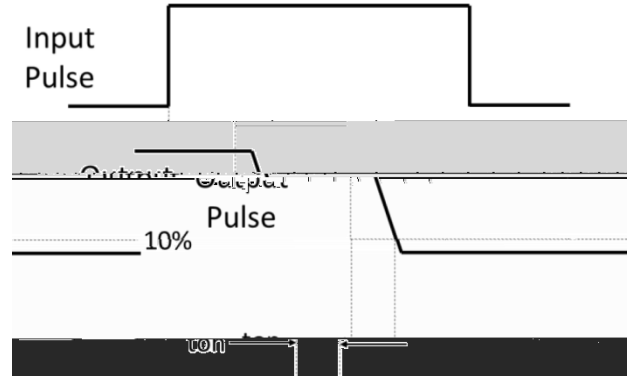


Fig 1 4:


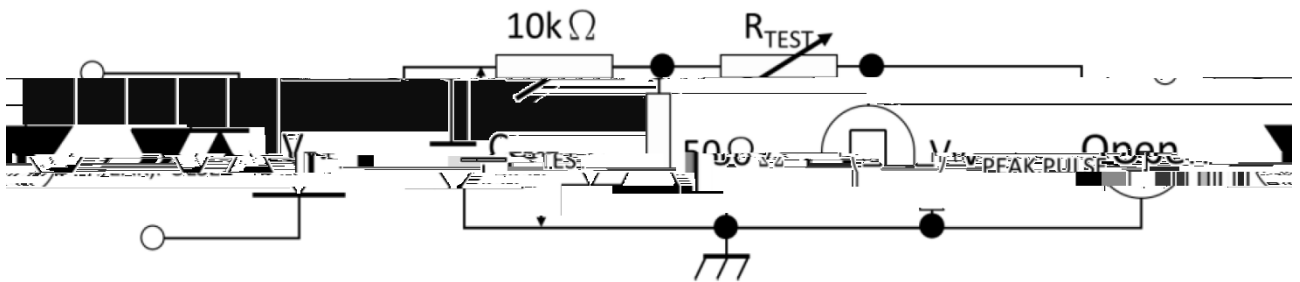


Fig 1 5:



REFLOW INFORMATION

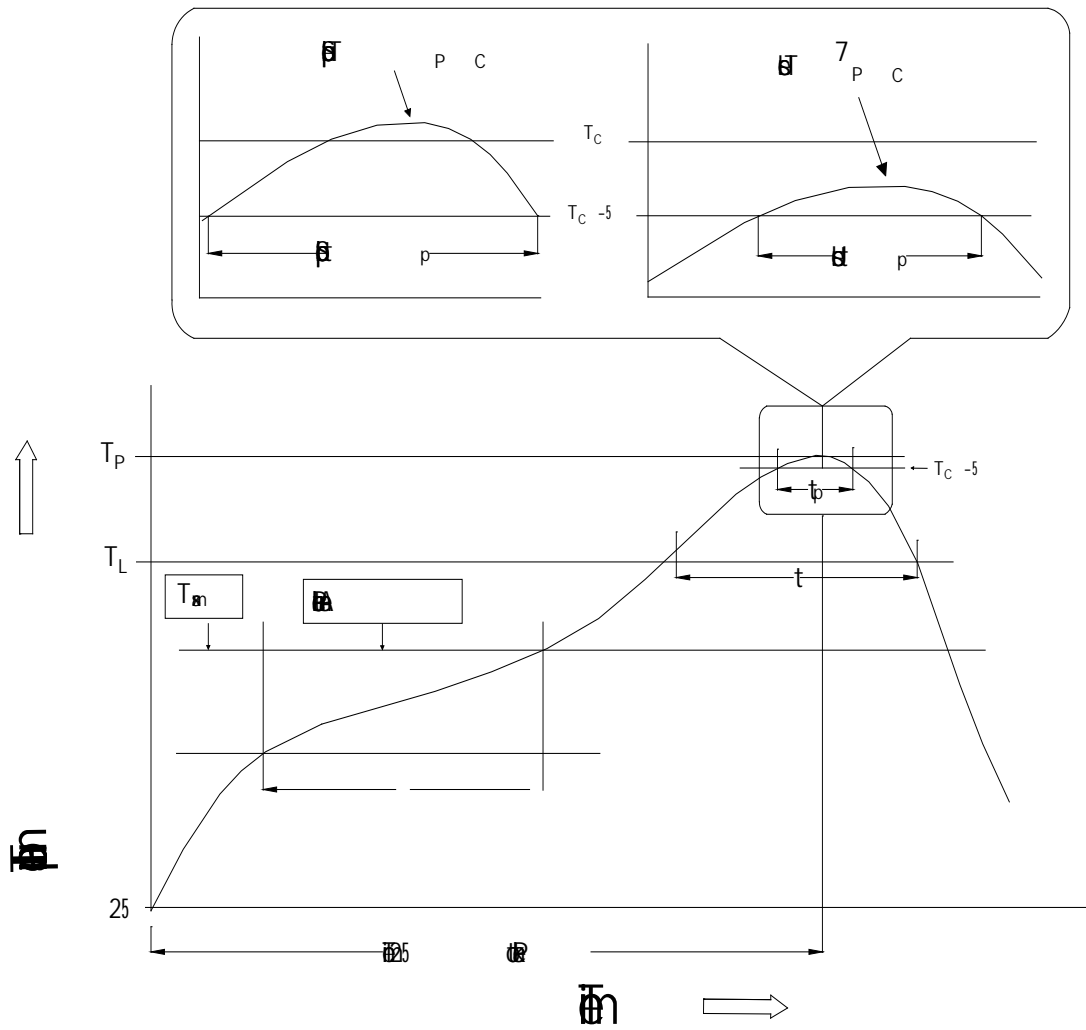

04

Je