




ACJT210-8U 2A TRIAC

Rev.A.2.1

DESCRIPTION:

The ACJT210-8U triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT210-8U embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-92 is RoHS compliant.



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage ($T_j=25^\circ C$)	V_{DRM}	800	V
Repetitive peak reverse voltage ($T_j=25^\circ C$)	V_{RRM}	800	V
RMS on-state current	$I_{T(RMS)}$	2	A
Non repetitive surge peak on-state current ($t_{SM}=20ms, T_j=25^\circ C$)	I_{TSM}	25	A


Peak pulse voltage
($T_j=25$; non-repetitive,off-state;FIG.7)

V_{pp}

4.5

kV

ORDERING INFORMATION

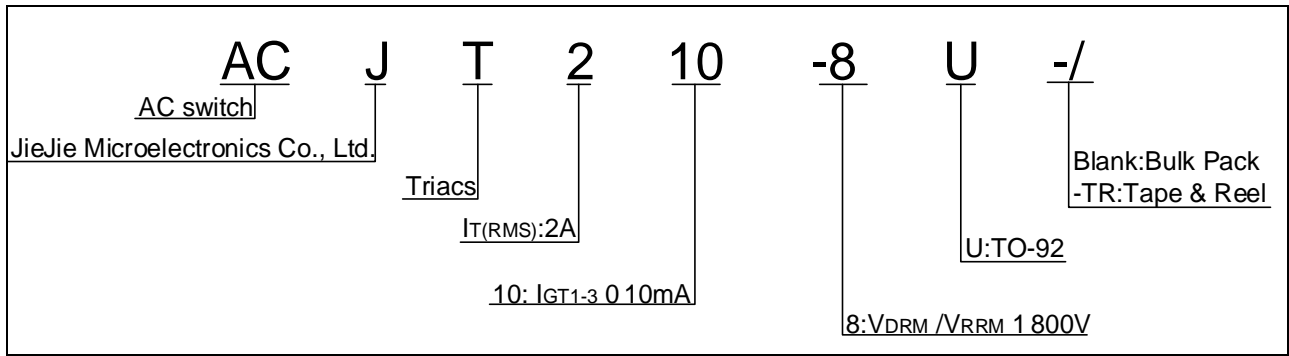

MARKING


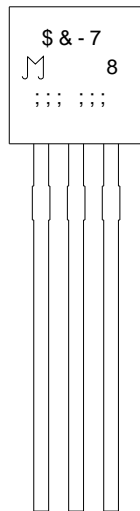


FIG.1: Maximum power dissipation versus RMS on-state current





FIG.2: RMS on-state current versus case temperature

FIG.7 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

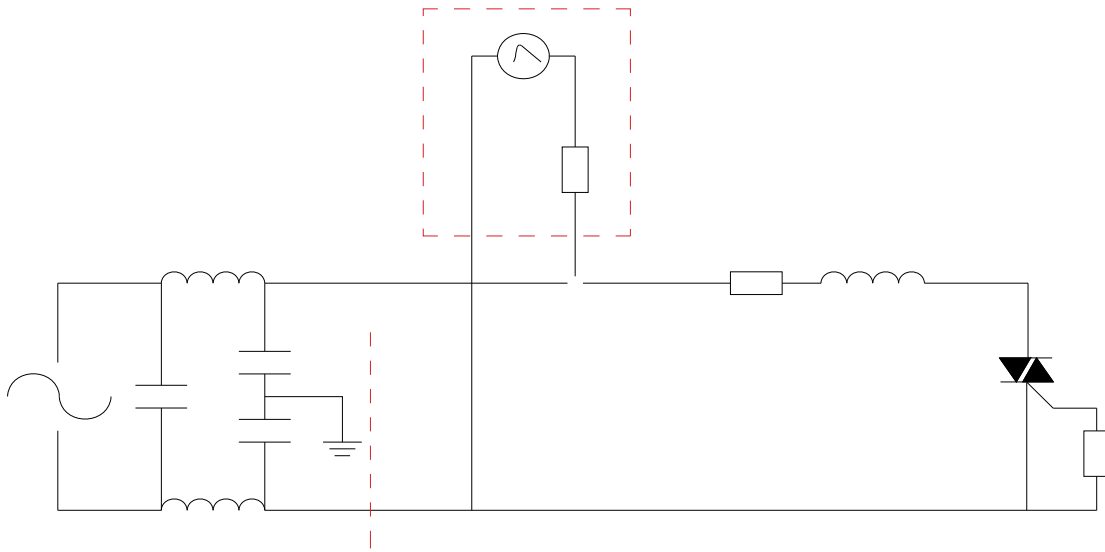

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
ACJT210-8U	800	10	TO-92	1,000	Bulk Pack
ACJT210-8U-TR				2,000	Tape & Reel

Document Revision History

Date	Revision	Changes
Apr.14, 2023	A.1.0	Last updated
Mar.27, 2025	A.2.0	Renew PACKAGE MECHANICAL DATA
Sept.28, 2025	A.2.1	Revise PACKAGE MECHANICAL DATA

ACJT210-8U

Information furnished in this A

Jiân ps =

lit r for the A

d ī fi > se n) fū m a t i o n (ē m o n i t o r t i o n f o r c e c i n f o r m a t i o n n

i n t h i s A c ā n p e) i t o > n — i c e A n μ r p

s r A n e d , p o e u (ē n

i n t h i s A u (e n h ā e n i n f m

Ⓜ ā n p s = M M M

muXe ced ' A