




JCT620C 20A SCR

Rev.A.1.1


DESCRIPTION:

With high ability to withstand the shock loading of large current, JCT620C SCR provides high dV/dt rate with strong resistance to electromagnetic interference. It is especially recommended for use on solid state relay, motorcycle, power charger, T-tools etc. Package TO-220C is RoHS compliant.



MAIN FEATURES

ABSOLUTE MAXIMUM

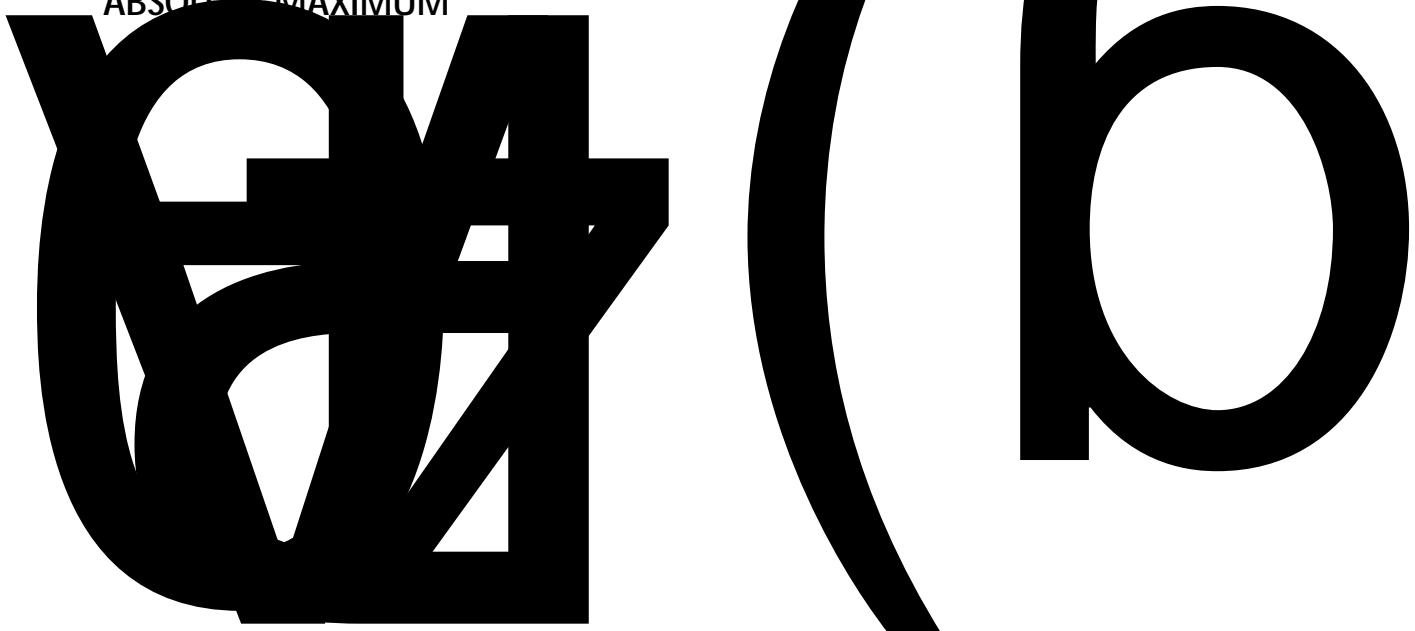

| | | | |
|--|----------|-----|----|
| Peak gate power | P_{GM} | 20 | W |
| Peak pulse voltage ($T_j=25$; non-repetitive,off-state;FIG.7) | V_{pp} | 0.5 | kV |

ELECTRICAL CHARACTERISTICS ($T_j=25$ unless otherwise specified)

| Symbol | Test Condition | Value | | | Unit |
|-----------|---|-------|------|------|------------|
| | | MIN. | TYP. | MAX. | |
| I_{GT} | $V_D=12V R_L=33$ | - | - | 15 | mA |
| V_{GT} | | - | - | 1 | V |
| V_{GD} | $V_D=V_{DRM} T_j=125 R_L=3.3k$ | 0.2 | - | - | V |
| I_L | $I_G=1.2I_{GT}$ | - | - | 60 | mA |
| I_H | $I_T=500mA$ | - | - | 50 | mA |
| dV/dt | $V_D=400V$ Gate Open $T_j=125$ | 500 | - | - | V/ μs |
| t_{on} | $I_G=40mA I_A=400mA I_R=40mA$ $T_j=25$ | - | 5 | - | μs |
| t_{off} | | - | 70 | - | |

STATIC CHARACTERISTICS


| Symbol | Parameter | | Value(MAX.) | Unit |
|----------|---------------------------|-----------|-------------|------|
| V_{TM} | $I_{TM}=40A t_p=380\mu s$ | $T_j=25$ | 1.55 | V |
| V_{TO} | Threshold voltage | $T_j=125$ | 0.74 | V |
| R_D | Dynamic resistance | $T_j=125$ | 20 | m |

I_{DRM}
 $V_D=V_{DRM} V_{RR}$

JCT620C

JieJie M

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards.

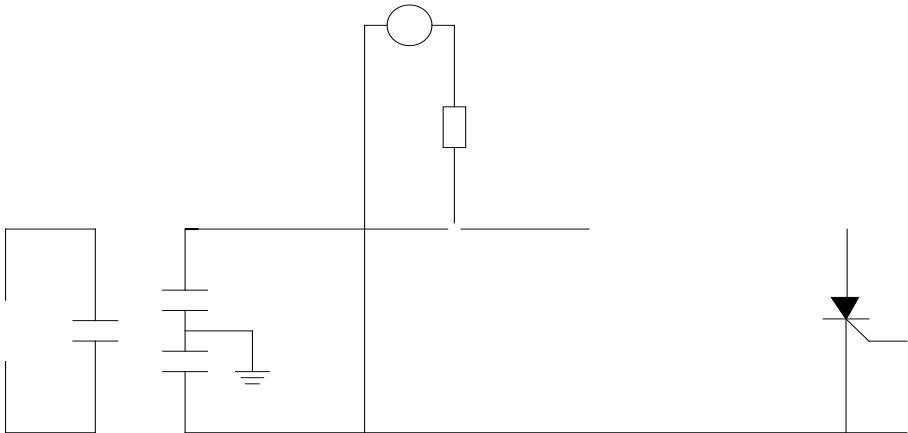

ORDERING INFORMATION

| Order code | Voltage V_{DRM}/V_{RRM} (V) | IGT(mA) | Package | Base qty. (pcs) | Delivery mode |
|------------|----------------------------------|---------|---------|--------------------|------------------|
| JCT620C | 600 | 15 | TO-220C | 50 | Tube |

Document Revision History

| Date | Revision | Changes |
|--------------|----------|-------------|
| Apr.13, 2023 | A.1.0 | Last update |
| Oct.14, 2025 | | |

PACKAGE MECHANICAL DATA



Information furnished in this document is believed to be accurate and reliable.
However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the