



JX012U 1.25A Sensitive SCR

Rev.A.2.1

DESCRIPTION:

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

ELECTRICAL CHARACTERISTICS

Symbol	Test Condition	Value			Unit
		MIN.	TYP.	MAX.	


STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit

ORDERING INFORMATION

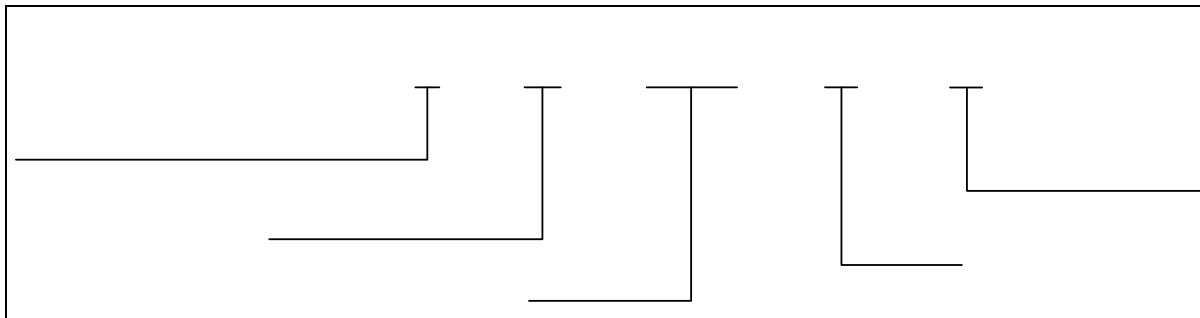

MARKING

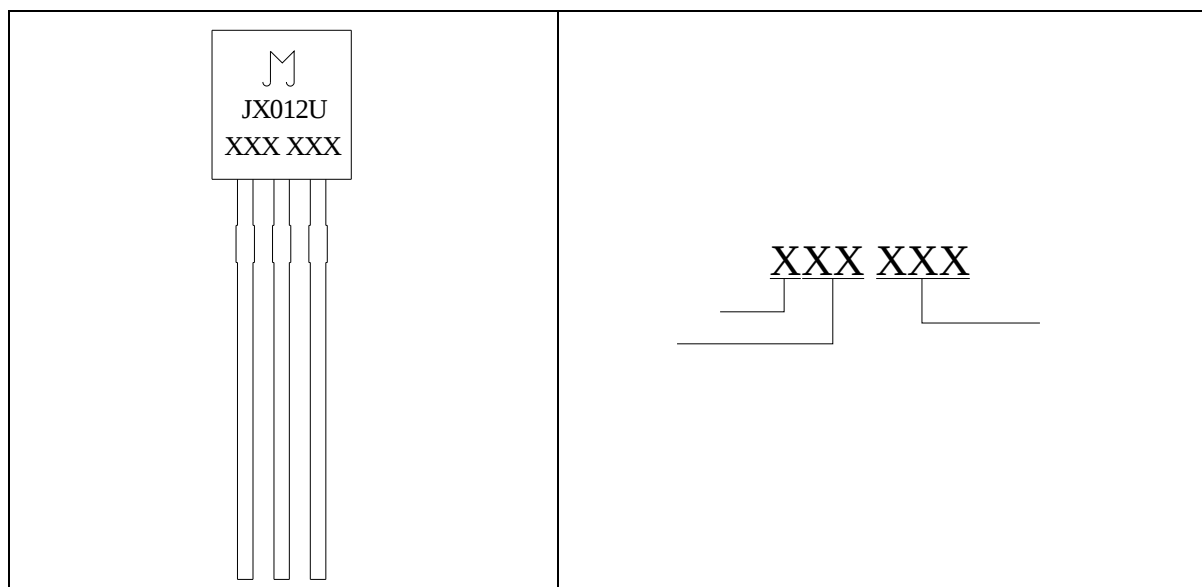


FIG.1:

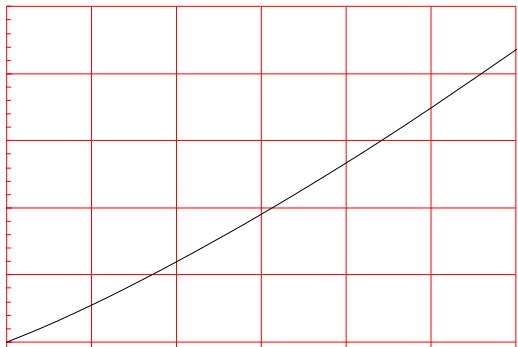


FIG.2:

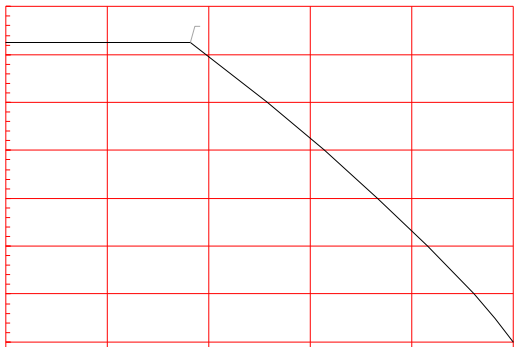


FIG.3:

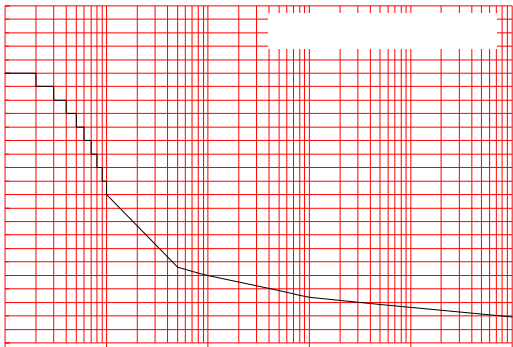


FIG.4:

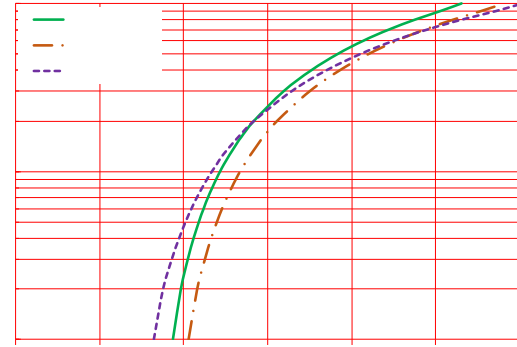


FIG.5:





FIG.6:

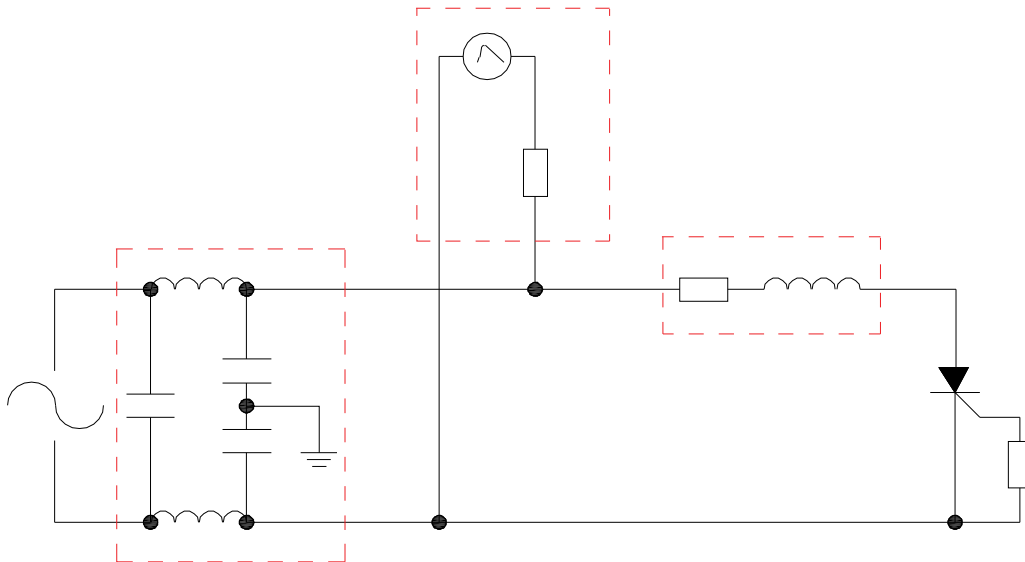


LEAD FORMING AND SOLDERING

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(μA)	Package	Base qty. (pcs)	Delivery mode
JX012U	1200	≤200	TO-92	1,000	Bulk Pack
JX012U-TR				2,000	Tape & Reel

Document Revision History

PACKAGE MECHANICAL DATA

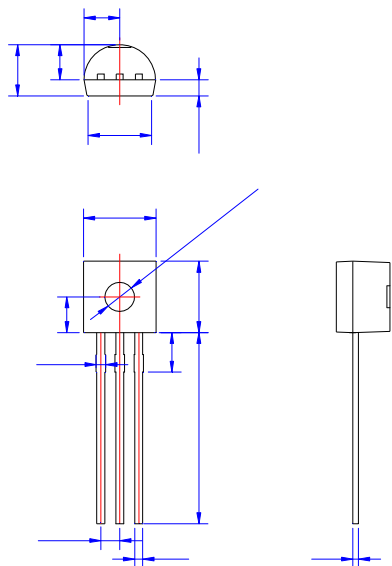

JX012U

