



T1220H-8A 12A TRIAC

Rev.A.1.1

The T1220H-8A triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T1220H-8A provides a very high switching capability up to junction temperatures of 150°C. By using an internal ceramic pad, T1220H-8A provides a rated insulation voltage of 2500 VRMS, complying with UL standards (File ref: E252906). Package TO-220A is RoHS compliant.

---

| Parameter | Symbol | Value | Unit |
|-----------|--------|-------|------|
|-----------|--------|-------|------|

---

|  |             |     |    |
|--|-------------|-----|----|
| Average gate power dissipation ( $T_j=150$ )                         | $P_{G(AV)}$ | 1   | W  |
| Peak gate power  | $P_{GM}$    | 10  | W  |
| Peak pulse voltage<br>( $T_j=25$ ; non-repetitive, off-state; FIG.7) | $V_{pp}$    | 4.5 | kV |

( $T_j=25$  unless otherwise specified)

| Symbol               | Test Condition                            | Quadrant | Value |     | Unit |
|----------------------|---|----------|-------|-----|------|
| $I_{GT}$             | $V_D=12V R_L=33$                          | - -      | MAX.  | 20  | mA   |
| $V_{GT}$             |   | - -      | MAX.  | 1   | V    |
| $V_{GD}$             | $V_D=V_{DRM} T_j=150$<br>$R_L=3.3k$       | - -      | MIN.  | 0.2 | V    |
| $I_L$                | $I_G=1.2I_{GT}$                           | -        | MAX.  | 25  | mA   |
|                      |   |          |       | 55  |      |
| $I_H$                | $I_T=500mA$                               |          | MAX.  | 25  | mA   |
| dV/dt                | $V_D=540V$ Gate Open $T_j=150$            |          | MIN.  | 400 | V/ s |
| (dI/dt) <sub>c</sub> | $V_j=150$                                 |          | MIN.  | 3   | A/ms |
| $t_{on}$             | $I_G=40mA I_A=200mA I_R=20mA$<br>$T_j=25$ |          | TYP.  | 3   | s    |
| $t_{off}$            |   |          |       | 60  |      |

| Symbol   | Parameter              |           | Value(MAX.) | Unit |
|----------|------------------------|-----------|-------------|------|
| $V_{TM}$ | $I_{TM}=17A t_p=380$ s | $T_j=25$  | 1.4         | V    |
| $V_{TO}$ | Threshold voltage      | $T_j=150$ | 0.75        | V    |

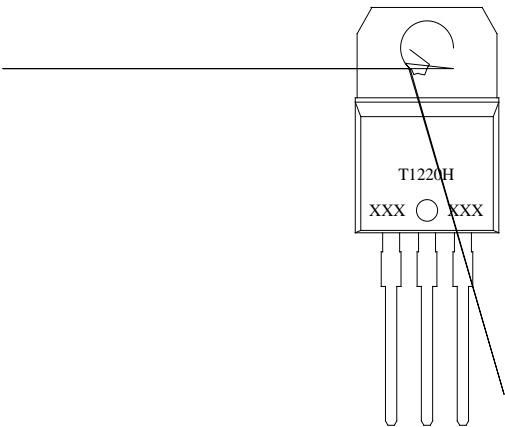
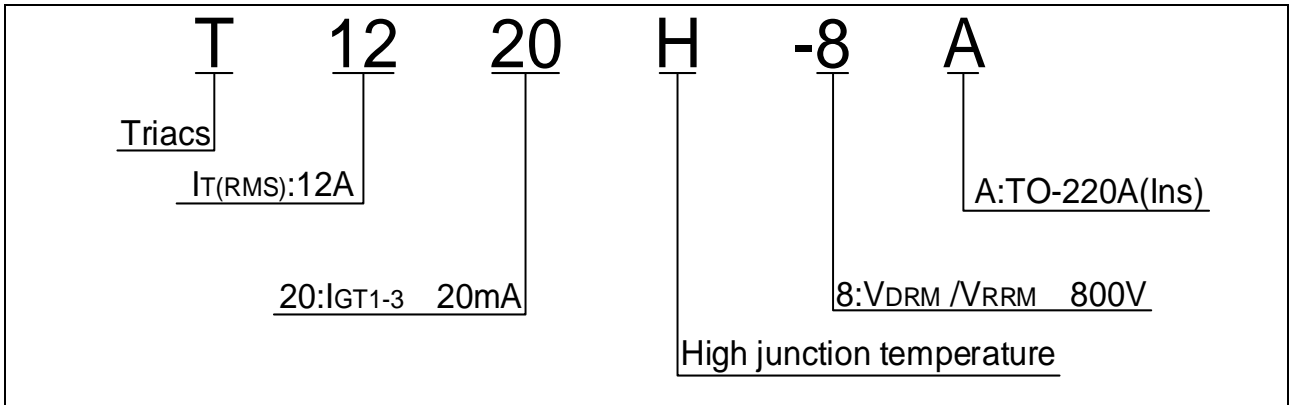


FIG.1: Maximum power dissipation versus RMS on-state current

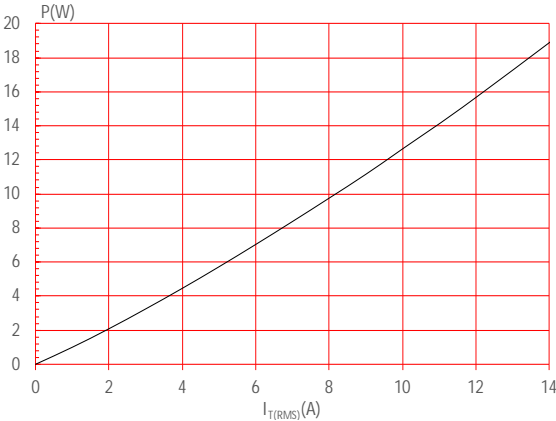



FIG.2: RMS on-state current versus case temperature



| Order code | Voltage<br>$V_{DRM}/V_{RRM}$ (V) | IGT(mA) | Package      | Base qty.<br>(pcs) | Delivery<br>mode |
|------------|----------------------------------|---------|--------------|--------------------|------------------|
|            |                                  | - -     |              |                    |                  |
| T1220H-8A  | 800                              | 20      | TO-220A(Ins) | 50                 | Tube             |

### Document Revision History

| Date         | Revision | Changes      |
|--------------|----------|--------------|
| Apr.11, 2023 | A.1.0    | Last updated |
| Oct.11, 2025 | A.1.1    | Revise       |



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.