




DESCRIPTION:

The JST04K-600CW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controller. JST04K-600CW snubberless triac is specially recommended for use on inductive loads. Package TO-252 is RoHS compliant.

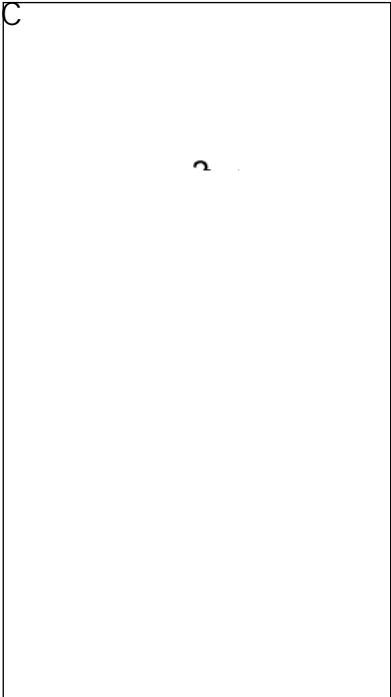

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	4	A
$V_{DRM} / V_{RRM}$	600	V
$I_{GT} / I_{G}$	35/35	mA

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	$T_{stg}$	-40~150	
Operating junction temperature range	$T_j$	-40~125	
Repetitive peak off-state voltage ( $f=25$ )	$V_{DRM}$	600	V
Repetitive peak reverse voltage ( $f=25$ )	$V_{RRM}$	600	V
RMS on-state current ( $T=97$ )	$I_{T(RMS)}$	4	A
Non repetitive surge peak on-state current (full cycle, $p=20ms$ , $f=25$ )	$I_{TSM}$	40	A
Non repetitive surge peak on-state current (full cycle, $p=16.6ms$ , $f=25$ )		44	
$I^2t$ value for fusing ( $t=10ms$ , $T=25$ )	$I^2t$	8	A <sup>2</sup> s
Critical rate of rise of on-state current ( $I_G=2 \times I_{GT}$ , $f=100Hz$ , $f=125$ )	$di/dt$	80	A/s
Peak gate current ( $t_p=20s$ , $T_j=125$ )	$I_{GM}$	4	A
Average gate power dissipation ( $f=125$ )	$P_{G(AV)}$	0.5	W
Peak gate power	$P_{GM}$	10	W

Peak pulse voltage ( $T_j=25$ ; non-repetitive, of state; FIG.8)	$V_{pp}$	4	kV
---	----------	---	----

ELECTRICAL CHARACTERISTICS ( $T_j=25$  unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
$I_{GT}$	$V_D = 12V$ $R_L = 33$	- -	MAX.	35	mA
$V_{GT}$		- -	MAX.	1	V
$V_{GD}$	$V_D = V_{DRM}$ $T_j = 125$ $R_L = 3.3k$	- -	MIN.	0.2	V
$I_L$	$I_G = 1.2I_{GT}$	-	MAX.	50	mA

ORDERING INFORMATION

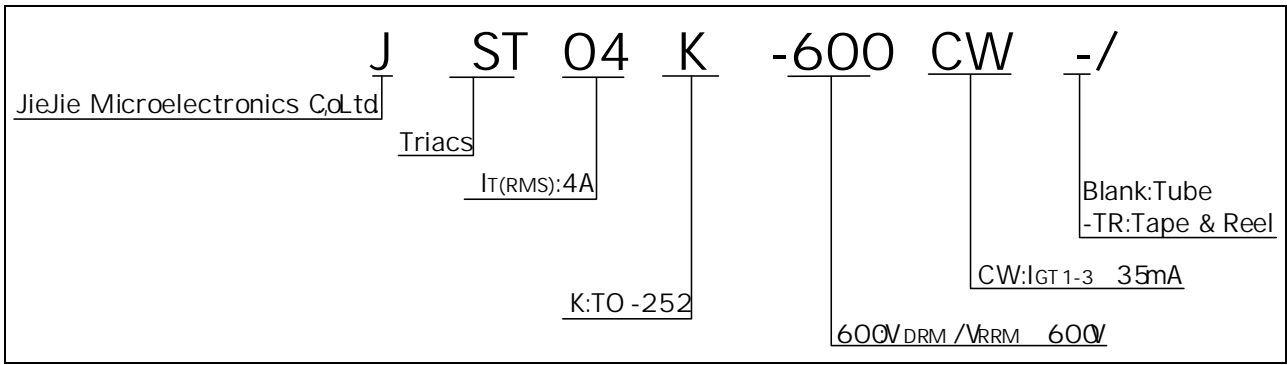


FIG.1 : Maximum power dissipation versus RMS on-state current




FIG.2: RMS on-state current versus case temperature



JST04K-600CW





DELIVERY MODE



