

BT131-800D 1A TRIAC

Rev.A.1.0

DESCRIPTION:

The BT131-800D triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Package SOT-223 is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range			
Repetitive peak reverse voltage ($T_j=25$)	V_{RRM}	800	V -

ELECTRICAL CHARACTERISTICS (unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33	- -	MAX.	5	mA
				10	
V _{GT}		ALL	MAX.	1.3	V
V _{GD}	V _D =V _{DRM} T _j =125 R _L =3.3k	ALL	MIN.	0.2	V

MARKING

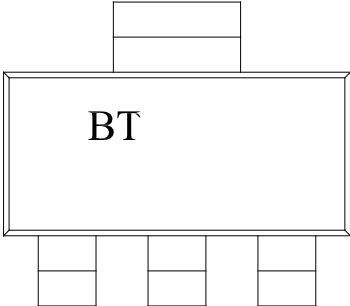


FIG.3: RMS on-state current versus ambient temperature (printed circuit board FR4, copper thickness: P (full cycle)

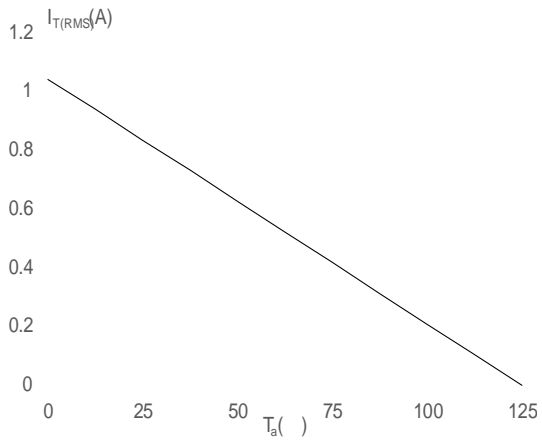


FIG.4: Surge peak on-state current versus number of cycles

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
		-	-			
BT131-800D	800	5	10	SOT-223	4,000	Tape & Reel

Document Revision History

Date	Revision	Changes
Apr.17, 2023	A.1.0	Last updated
Oct.24, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

